


SJE series

Zero offset scaffold castors, conform to DIN 4422: HD 1004: 1992 and BS 1139: part 3: 1994.

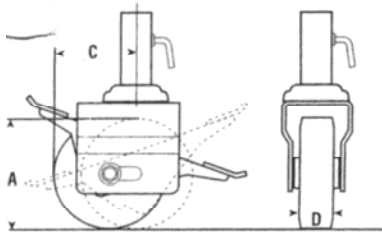


A	B	C	D	Static load	Wheel Type	Swivel	Fittings available			Brakes avl.	
							Insert into basic castor reference
5" 125	160	165	40	500	NYLON	☐	...SC2	...B21	...T33	BX4	B
			40	500	RUBBER TYRED	☐	...SC2	...B21	...T33	BX4	B
			45	600	NYTHANE	☐	...SC2	...B21	...T33	BX4	B
6" 150	190	165	45	820	NYLON	☐	...SC2	...B21	...T33	BX4	B
			45	820	RUBBER TYRED	☐	...SC2	...BP2	...T33	BX4	B
			45	600	NYTHANE	☐	...SC2	...B21	...T33	BX4	B
8" 200	240	165	50	820	NYLON	☐	...SC2	...B21	...T33	BX4	B
			50	1000	NYLON	☐	...SC2	...B21	...T33	BX4	B
			50	820	RUBBER TYRED	☐	...SC2	...B21	...T33	BX4	B
			55	820	NYTHANE	☐	...SC2	...B21	...T33	BX4	B

Example: An SJE scaffold castor with 200 diameter Nythane wheel, plug top fitting and a single pedal brake would have the reference **SJE 200 NTOE B21 BX4**

Fitting ref.	W	L
SC2	50.8 (2")	101

Fitting ref.	W	L
B21	38.3 (1.51")	52.5


Fitting ref.	Holes suit bolt
T33	10

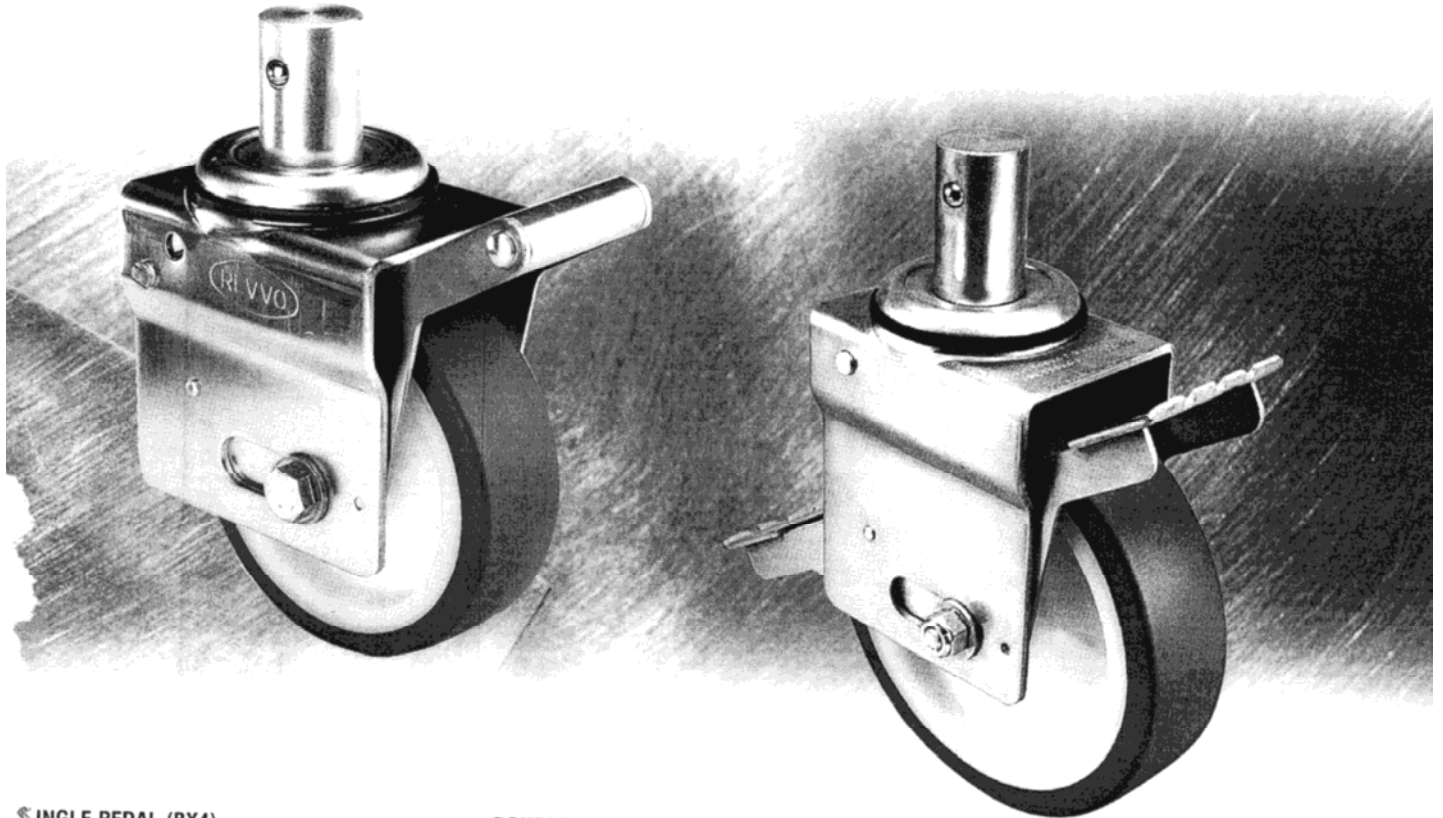

SINGLE PEDAL (BX4)

A single ended operating pedal

Add suffix **BX4** to catalogue reference



DOUBLE PEDAL (B)

A double ended operating pedal

Add suffix **B** to catalogue reference

